






CARPIGIANI SOFT SERVE CONSULTING

CARPIGIANI SOFT SERVE CONSULTING consultants can help you transform your idea into a successful business!

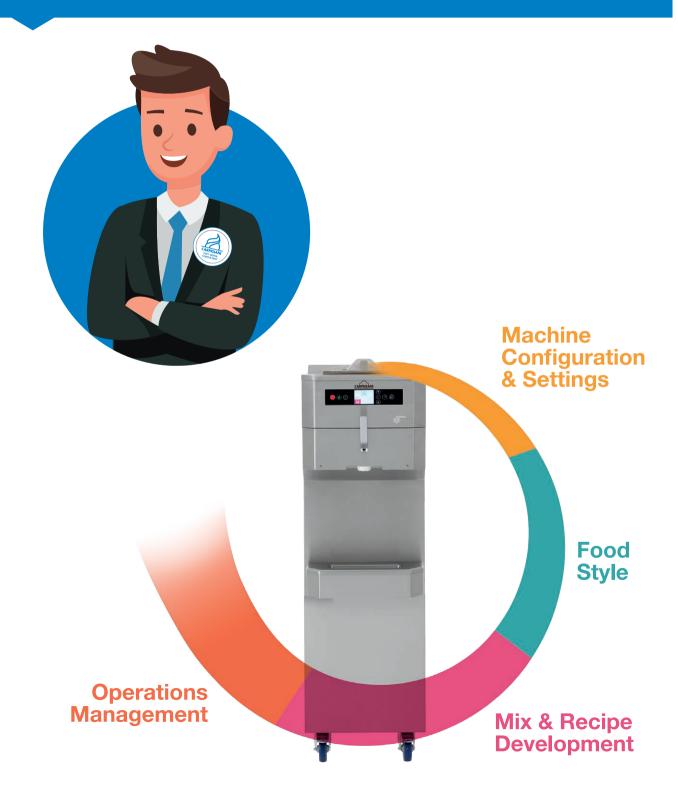

Efficient Fundamental High performance











> PERFORMANCE AND QUALITY

Produce Soft Serve Gelato, Ice Creams, Sorbets and Frozen Yogurt. Thanks to the independent cylinders, in the XVL 3 it is possible to simultaneously mix products of different consistencies.



Creamy Soft Serve Gelato

Thanks to the H-O-T system and to the type of feed (gravity or pump) it is possible to set the desired consistency for creamy ice creams, from a delicate Vanilla to a robust chocolate.



Soft Serve Sorbets

Choose the desired consistency of the Serve Sorbets to create robust flavors with lots of fiber or classic lemon sorbet. Thanks to the H-O-T system and to the type of feed system used (gravity or pump).



Frozen Yogurt

Choose the desired consistency of the Frozen Yogurt, to produce a classic frozen yogurt or a unique soft serve gelato yogurt. Thanks to the H-O-T system and to the type of feed system used (gravity or pump).

Custom shape Gelato





PERFORMANCE AND QUALITY

Star Door

Star Door allows the use of the new nozzles and the single-portion kit.



Optional Monoportion kit. Kit of nozzles suitable for filling small cups, cannoli's and other frozen dessert monoportions.







Optional Blender. Integrated blender uses disposable spoons to conveniently and hygienically mix toppings or syrups into a soft serve cup.



Optional Nozzles. Customize the Soft Serve by choosing new and unique nozzles that fit your style.



Pompa - *Pump*

Optional Pump / Gravity kit (Only for XVL 3 P models using the POM Beater) Run pump & gravity feed cylinders at the same time. Simultaneously serve traditional mixes and mixes with lots of fiber or fruit seeds.



Optional Winter Door (for XVL 3 models). This unique door is composed of two separate doors. Giving the user the freedom to operate one or both cylinders or even operate one cylinder while cleaning the other. The twist door is inhibited.





Hard-O-Tronic[®]. The electronic control system that allows you to change the consistency of the Soft Serve in a simple and fast way.

Choice of MIX FEEDING SYSTEM

PERFORMANCE

AND QUALITY

Submerged Pump - Version P

Ideal for creating dry and compact Soft Serve. Pressurized steel pump with advanced thermoplastic polymer gears. Thanks to the holes in the pump regulator, it is possible to obtain 40-80% overrun. It is possible to adjust the overrun even when the tank is full!

Gravity - Version G

Ideal for a dry and compact Soft Serve able to contain a high amount of fibers or small fruit pieces with an overrun of up to 40%. The different diameters of the holes on the feeding needle naturally dose the mixture with air. Thanks to the repeated holes both on the lower part and on the upper part of the overrun adjuster, it is possible to adjust the overrun even when the tank is full!





BEATER Choice

2E-RSI High Efficiency Beater

Ideal for soft and Creamy Soft Serve. Stainless steel beater with plastic scrapers and removable shaft.

High Efficiency Beater in POM Ideal for Frozen Yogurt, Yogurt mixes and Creamy Soft Serve with gravity fed recipes. Convenient Monobloc beater in foodgrade plastic. Standard in gravity versions.





Direct expansion cylinder

Optimized refrigeration process. Faster freezing times & more energy savings. Pre-loading operation is simple and safe, thanks to the new position of the feed hole.





CONVENIENCE

New solutions for maximum **convenience** during use

Tank Agitator

Prevents product stratification during storage and improves heat exchange during pasteurization.





Adjustable dispensing speed

Adjustable delivery flow to meet all volume and speed needs.

Self Closing

User-friendly Self Closing levers automatically close to stop the flow of product, eliminating any waste. Automatic self closing levers are easy to assemble & disassemble. Ideal for rotating staffs.



When the machine is not manned, the levers can

be removed and reassembled quickly, without the

Pinless Aluminum levers





Optional Dry Filling system

Automatic dry filling system, allows users to automatically add water as well as mix powder mixtures directly in the tank, saving time, space and reducing the possibility of dosing errors.





Scan the **QR Code** on the front of the machine to access the most up to date equipment information: Instruction Manual, Carpi Care kit & Carpi Clean kit.

Versatile machine (for XVL 3 models). Thanks to three different functions, it is possible to choose the side on which you want to operate. Left side only or right side only in low season, both during high productivity.



SAVINGS

New **high-performance** electric gearmotors and condensers

Independent pump transmission. (P version). Extends the life of the pump and gears. Ensures flexibility with high performance.



machine Refrigeration system is cooled thanks to the inlet and outlet water circuit, conveniently located at the rear of the machine.

Water Cooled

Air cooled machine Thanks to the rear chimney, it is possible to optimize the installation space and to place the machines side by side.





Minimum residue of mixture in the tank (0.2 liters.) Thanks to the conformation with depression in the rear part of the tank, during the cleaning phase the waste of the mixture is minimal.

Choice of **COOLING**



SAFETY

More operational safety and more control during production



Ergonomic design. Reduced risk of injury, with corners even rounder where the operator works.

Black-out and water outage

After a power or water failure, if the temperature-time parameters guarantee that the mixture has not undergone any alteration, the machine resumes the program in progress. Otherwise, if the machine is self-pasteurizing, a pasteurization cycle is automatically started, warning the operator with a message on the display. In the case of the non self-pasteurizing version, the machine requires washing.



Optional Teorema

Guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are.



Button lock

For added security, the display buttons can be locked to prevent accidental errors.





> HYGIENE


Easy cleaning, guaranteed hygiene



Multifunctional Cleaning Button

Possibility to activate or deactivate the pump and the beater individually or together according to cleaning needs. One of the functions is hot cleaning. By simultaneously activating the beater and the heating of the cylinder surface, the production grease residues are quickly dissolved.





With the automatic **self-pasteurization** system you can choose when to wash the machine up to a maximum interval of 42 days. As a further guarantee of hygienic safety, if the operator does not perform the complete cleaning at the end of the set days, the machine goes into automatic block.





Removable pump shaft It simplifies cleaning procedures and guarantees maximum hygiene and reliability.

service

Carpi Care kit



Custom kits, designed to always keep your machine hygienically perfect.




Scheduled start. Set


the pasteurization, storage programs to automatically run at a convenient time for you, such as overnight and be fully functional the next day.

Ergonomic lid Ergonomic transparent tank lid for easy tank inspection.




MACHINE CONFIGURITATION

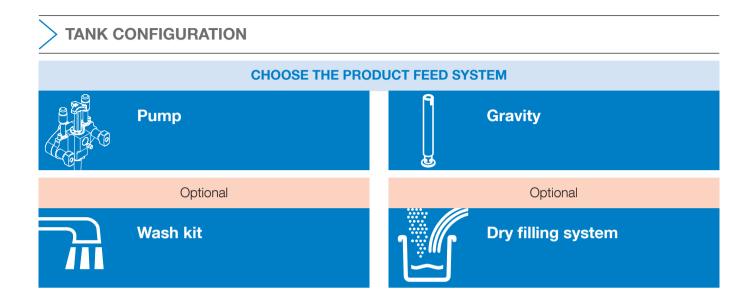


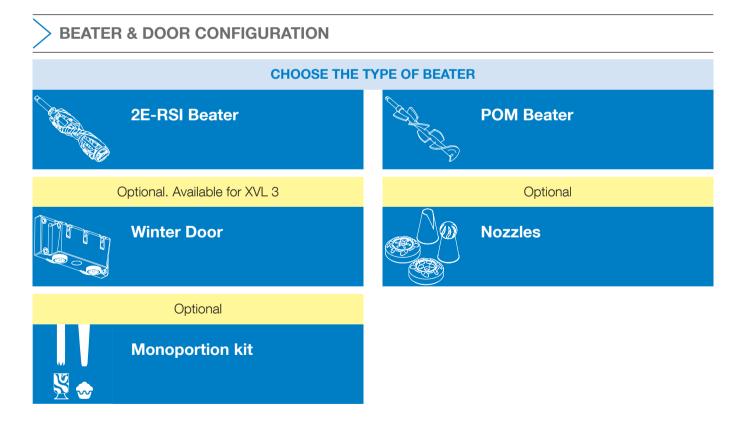

MACHINE CONFIGURITATION

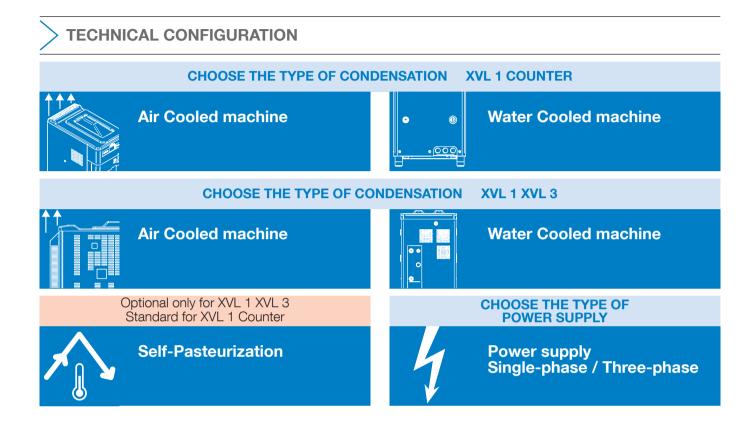

ACCESSORIES CONFIGURATION

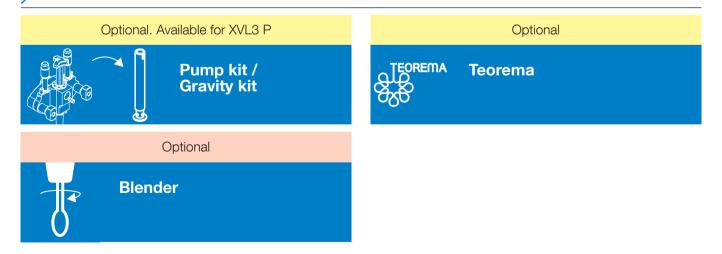

Legend: 🗸 Optional ONLY upon purchase 🗸 Optional available even after purchase

CARPIGIANI SERVICE CARPIGIANI services

WHO WE ARE

Carpigiani Services. Always by your side! The extensive Carpigiani service network is at your disposal with a widespread assistance network that guarantees a wide coverage of the territory with over 480 authorized service centers and 1500 specialized technicians around the world, for over 70 years guaranteeing a widespread, global presence. Carpigiani Services ensures rapid and professional assistance.

WHAT WE OFFER

Original spare parts. Carpigiani original spare parts, manufactured in compliance with national and international food safety regulations, ensure the durability of the components and extend the life of the machine. They are the only ones able to guarantee efficiency and safety. Carpigiani original spare parts are guaranteed for 1 year.

Carpi Care kit

kit. Dedicated kit of gaskets and brushes to keep each machine

Periodically ask your dealer Carpi Care kit and Carpi Clean



MONTHS







Carpi Clean kit



CARPIGIANI SERVICE

WHAT WE OFFER

Specialized technicians. Carpigiani technicians are professionals who are always up-to-date thanks to solid and constant training courses that guarantee high levels of competence for any inspection, maintenance, cleaning and repair intervention.



Preventive maintenance.

Thanks to periodic checks, entrusted to certified technicians, the machine can always work in optimal conditions, preventing any downtime.

Extended Warranty. Operate machine in complete tranquility, thanks to the Carpigiani extended warranty. In case of needs, in fact, Carpigiani technicians are able to restore machine operation with original spare parts.





Scheduled Cleaning. Possibility of entrusting the periodic cleaning of the machine to expert technicians.




Teorema. Teorema Remote Control and diagnosis system for remote monitoring of machine operation. The customer can access the machine via computer, tablet or mobile device to remotely monitor operations. Teorema also facilitates the assistance service: Carpigiani technicians are alerted on the configuration parameters as if they were operating directly on the machine.


technical data - dimensions

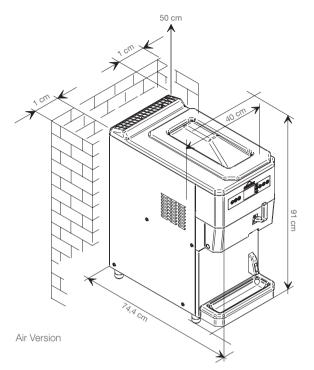

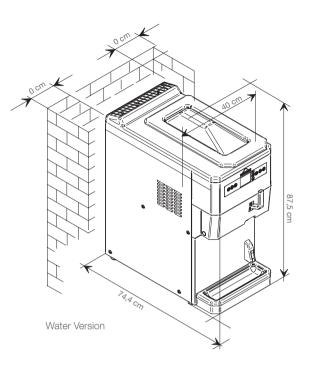


XVL 1 Counter

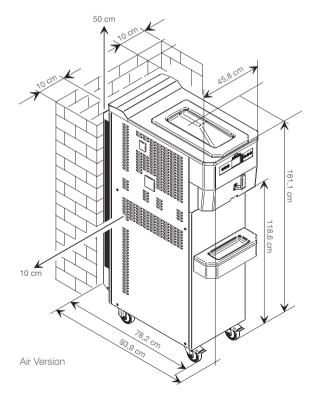


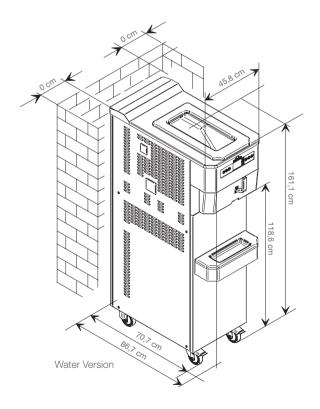

XVL 1 STEEL

technical data - dimensions

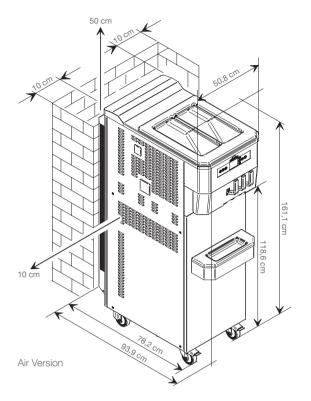

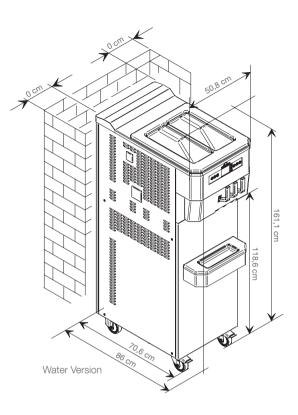

XVL 3 STEEL

XVL 1 - XVL 3 Steel





\frown		Flavours	Mix Delivery System	Mix Delivery System (75gr portions)		Tank Capacity	Cylinder Capacity	Rated Power Input	Fuse Size	Power Supply	Cooling System	Refrigerant	Net Weight	
				POM	2E-RSI	lt	lt	kW	Α	Volt Hz Ph			kg	
XVL 1 Counter P SP		1	Pump	-	310*	13	1,75	2,4	10	400/50/3**	Air, water optional	R452***	170	
XVL 1 Counter G SP			Gravity	265*	-								160	
XVL 1 Steel	Р	1	Pump	465*	510*	13	1,75	2,5	10	400/50/3**	Air, water optional	R452***	230	
XVL 1 Steel	G		Gravity	440*	-			2,4					225	
XVL 3 Steel	Р	2+1	Pump	630*	695*	13+13	1,75	5,0	16	400/50/3**	Air, water optional	R452***	310	
XVL 3 Steel	G		Gravity	600*	-			4,8	10				300	

*production capacity depends on the mix used and the room temperature **other voltages and cycles available upon request ***alternative solutions available.

XVL are produced by Carpigiani with UNI EN ISO 9001 Certified Quality System.

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary.





Via Emilia, 45 - 40011 Anzola dell'Emilia - BOLOGNA, Italy - T. +39 051 6505111 - info@carpigiani.it

an Ali Group Company

