


PERFORMANCE

TEMPERATURE RANGE	-40°C / +5°C
CAPABILITIES	5 pans
STEP GASTRONOMY GUIDES	68 mm
STEP PASTRY GUIDES	17.5 mm
STEP ICE CREAM GUIDES	17.5 mm
ICE CREAM TRAYS 165x360x120h mm	6
ICE CREAM TRAYS 250x360x120h mm	4
CARAPINE Ø200x250H mm	4

CHECK



FEATURES

- Two basic working functions: blast chilling SOFT and HARD , deep-freezing SOFT and HARD
- Latest generation fans
- High-density (about 42 kg/m3), HCFC-free polyurethane foam insulation - Thickness 60 mm
- Heart probe
- Total chamber inspectability for maximum hygiene
- Condensation tray
- Air condensation
- Heated core probe included
- Refrigerant fluid R290
- Copper-aluminum evaporator coil, cataphoresis painted with non-toxic epoxy resin
- LCD display with capacitive touch controls
- Easy-access, front-mounted IPX4 organised control cabinet

OPTIONAL

- Water condensing unit
- Set of castors
- Bi-directional 4.0 connectivity and wi-fi

STANDARD EQUIPMENT

- AISI 304 stainless steel supports for GN1/1 or 600x400 trays

OPTIONAL EQUIPMENT

- Variable pitch internal structure with 5 pairs of removable AISI 304 stainless steel 'L' rails, interlocking every 17.5 mm
- Variable pitch internal structure with 5 pairs of removable AISI 304 stainless steel anti-tilt 'C' rails, interlocking every 17.5 mm

DIMENSIONS

Width	790 mm [31.1 in]
Depth	850 mm [33.46 in]
Height	850 mm [33.46 in]
Weight	86 kg [189.63 lb]
Foot height	70-110 mm [2.76-4.33 in]
Door light width 1	670 mm [26.38 in]
Door light height 1	370 mm [14.57 in]
Door depth open 90°	1545 mm [60.83 in]
Inner depth	410 mm [16.14 in]
Packaging width	850 mm [33.46 in]
Packing depth	900 mm [35.43 in]
Packaging height	995 mm [39.17 in]
Packing weight	101 kg [222.71 lb]
Packing volume	0.76 m ³ [201.08 glus]

TECHNICAL DATA

Temperature range	-40°C / +5°C
Insulation thickness	60 mm [2.36in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	131 g [8.19oz]
Cooling power ASHRAE lbp	1200 W [4092btu/h]
Sound power	<70 dbA
Expansion valve type	Mechanics
Defrost type	Open door
Defrost water evaporation	Automatic
Interior lighting	Not present
Cooling power	2002 W
Climate class	5
Heat expelled	2500 W
Air Volume	1 m ³ /h

CAPABILITIES

GN grids	[]
----------	----

CAPABILITIES

GN guides step	68 mm
EN Grids	[]
Step guides EN	17.5 mm
IC grids	[]
Step IC guides	17.5 mm
5Lt tanks 360x165x120h mm	6
5Lt tanks 360x250x80h mm	4
Carapine 7Lt Ø200x250h mm	4

SUPPLY


Main power supply	220-240 V ~ 50 Hz
FLI - Full-Load Power	1559 W
FLA - Full-Load Amperage	7.84 A
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko

PERFORMANCE


Blast chilling capacity (+65°C -> +10°C) EN ISO22042	20 kg [44.1lb]
Freezing capacity (+65°C -> -18°C) EN ISO22042	15 kg [33.08lb]
Energy consumption per blast cycle (+65°C -> +10°C) UNI EN ISO22042	0.08 kW/kg
Energy consumption per freezing cycle (+65°C -> +10°C) UNI EN ISO22042	0.29 kW/kg
Blast-down time (+65°C -> +10°C) UNI EN ISO22042	120 min
Freezing time (+65°C -> -18°C) UNI EN ISO22042	270 min

DIMENSIONS



Vista Frontale
Frontal side

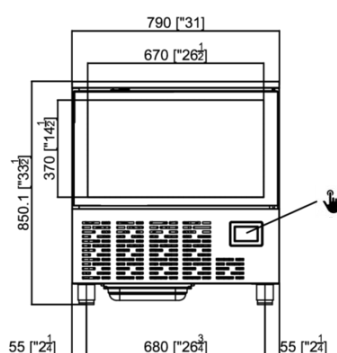

Vista Laterale
Lateral side

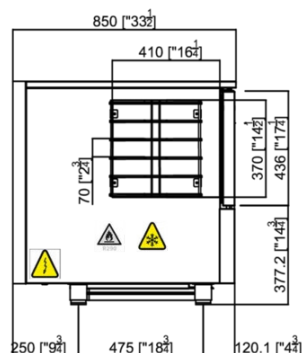

Vista Superiore
Top View

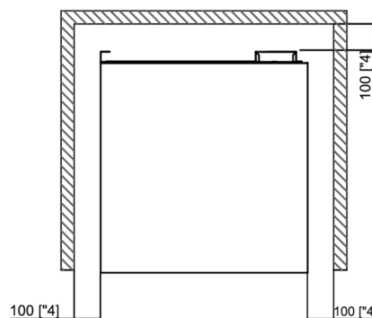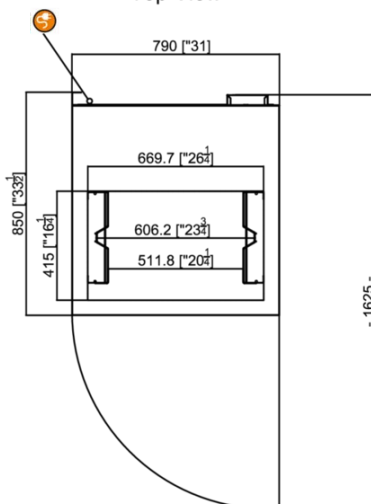

 Display con tasti capacitivi
Display with capacitive keys

 Cavo alimentazione elettrica
Power supply cable

 Impianto frigo
Refrigeration system

 Scatola elettrica
Electric box

 Tubo scarico acqua
Drain pipe