

 **38 kg/ 24h**

Ice makers - Spray System / Ice makers - Spray System:

C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C38 ALL GAS

220-240/50/1

Ice makers - Spray System



FEATURES

- Steel casing
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Feet kit 100mm

DEPOSIT

11,5 kg
575 pcs

DIMENSIONS

L x P x H (mm)



400 x 540 x 690



460 x 600 x 850

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

I / h

Kg

Kg

C38 A AG 220-240/50/1N



670

370

10

29

3.2

40

34

C38 W AG 220-240/50/1N



670

290

10

20.3

43.2

40

34

ICE TYPE

PCS / CYCLE
PZ / CICLO

WEIGHT ICE
PESO
GHIACCIO



Cubetto
PIENO 20 g
-38/46
35x 32x 37mm

28

20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	38 84	36 79	34 75	30 66
21° 70°	34 75	32 71	30 66	27 60
32° 90°	30 66	28 62	26 57	23 51
38° 100°	23 51	22 48	21 46	19 42

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	36 79	34 75	32 71	28 62
21° 70°	34 75	32 71	30 66	26 57
32° 90°	33 73	31 68	29 64	25 55
38° 100°	29 64	28 62	26 57	21 46

 **38 kg/ 24h**

Ice makers - Spray System / Ice makers - Spray System:





C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C38 ALL GAS


220-240/50/1

Ice makers - Spray System

DIMENSIONS

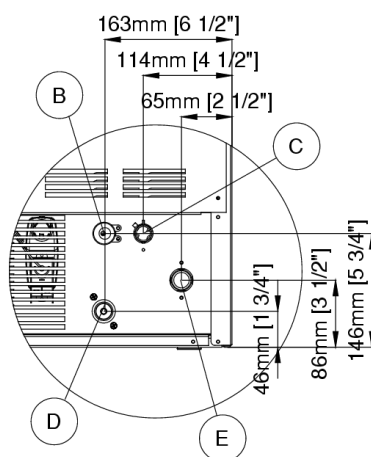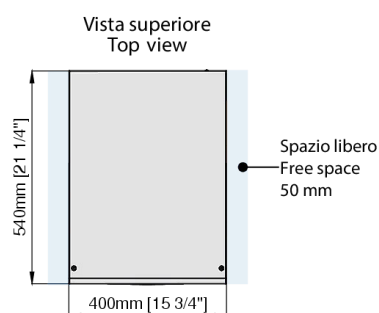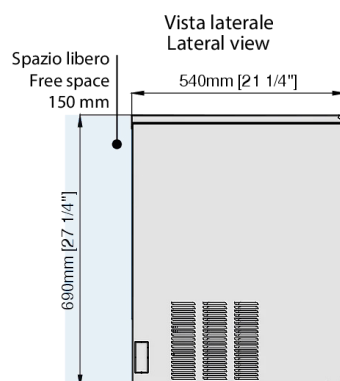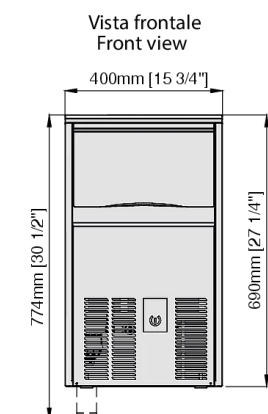

- B** Electrical cable supply
Ingresso alimentazione elettrica
- C** Water outlet connection
Attacco scarico acqua Ø 20 mm
- D** Water outlet connection
water condensation / Uscita acqua condensatore ad acqua Ø 20 mm
- E** Water inlet connection / Attacco entrata acqua - 3/4"G





Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	979 W
Air Volume	185 m³/h