

 **54 kg/ 24h**

Ice makers - Spray System / Ice makers - Spray System:

C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C54 ALL GAS

220-240/50/1

Ice makers - Spray System



FEATURES

- Steel casing
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

22,0 kg
1100 pcs

DIMENSIONS

	L x P x H (mm)
	500 x 580 x 800
	560 x 640 x 960


VOLTAGE

 220-240/50/1
220/60/1

GAS

 R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Cubetto PIENO 20 g -54 35x 32x 37mm	36	20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit














Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	54 119	53 117	49 108	42 93
21° 70°	46 101	45 99	41 90	35 77
32° 90°	43 95	42 93	38 84	32 71
38° 100°	39 86	38 84	34 75	28 62

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	54 119	53 117	50 110	48 106
21° 70°	51 112	49 108	47 104	44 97
32° 90°	49 108	47 104	45 99	42 93
38° 100°	47 104	45 99	43 95	40 88

TECHNICAL DATA

				 +°C -°C		 W		 W	 21°C 32°C +		
				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg
C54	A AG	220-240/50/1N			1167	520	10	23.3	4.5	432	50
C54	W AG	220-240/50/1N			1167	440	10	20.6	43.4	42	50

 54 kg/ 24h

Ice makers - Spray System / Ice makers - Spray System:


C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C54 ALL GAS

220-240/50/1

Ice makers - Spray System

DIMENSIONS

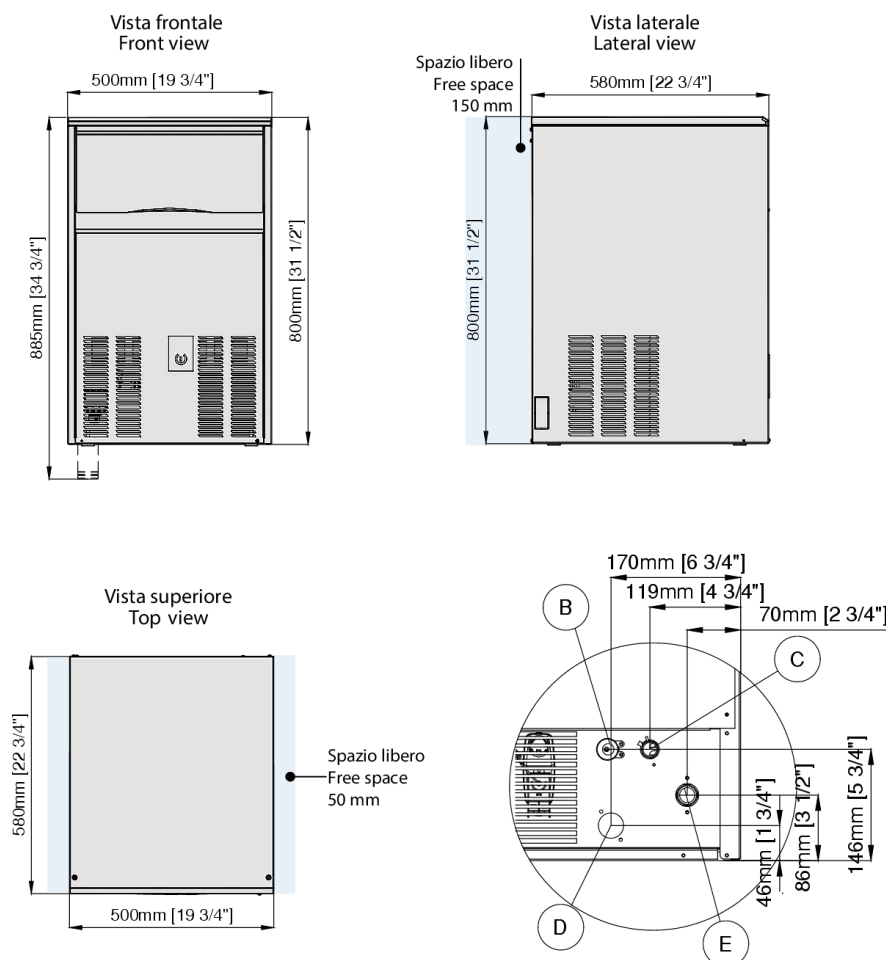



- B** Electrical cable supply
Ingresso alimentazione elettrica
- C** Water outlet connection
Attacco scarico acqua Ø 20 mm
- D** Water outlet connection
water condensation / Uscita acqua condensatore ad acqua Ø 20 mm
- E** Water inlet connection / Attacco entrata acqua - 3/4" G



Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

MyICE


Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1707 W
Air Volume	310 m³/h