

 **70 kg/ 24h**

Ice makers - Spray System / Ice makers - Spray System:

C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C70 ALL GAS

220-240/50/1

Ice makers - Spray System



FEATURES

- Steel casing
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL



- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection




DEPOSIT

42,0 kg
2100 pcs

DIMENSIONS

	L x P x H (mm)
	700 x 580 x 995
	740 x 640 x 1080


VOLTAGE

 220-240/50/1
220/60/1

GAS

 R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Cubetto PIENO 20 g -70/90 35x 32x 37mm	56	20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit














Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	70 154	69 152	67 148	63 139
21° 70°	65 143	63 139	61 134	57 126
32° 90°	60 132	58 128	56 123	52 115
38° 100°	49 108	47 104	45 99	42 93

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	75 165	73 161	71 156	64 141
21° 70°	72 159	70 154	68 150	61 134
32° 90°	70 154	68 150	64 141	59 130
38° 100°	63 139	62 137	59 130	54 119

TECHNICAL DATA

				 +°C -°C		 W		 W	 21°C 32°C		
				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
C70	A AG	220-240/50/1N			1315	620	10	20.9	10.3	53	62
C70	W AG	220-240/50/1N			1315	490	10	18.3	45.8	53	62

 **70 kg/ 24h**

Ice makers - Spray System / Ice makers - Spray System:


C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C70 ALL GAS

220-240/50/1

Ice makers - Spray System

DIMENSIONS

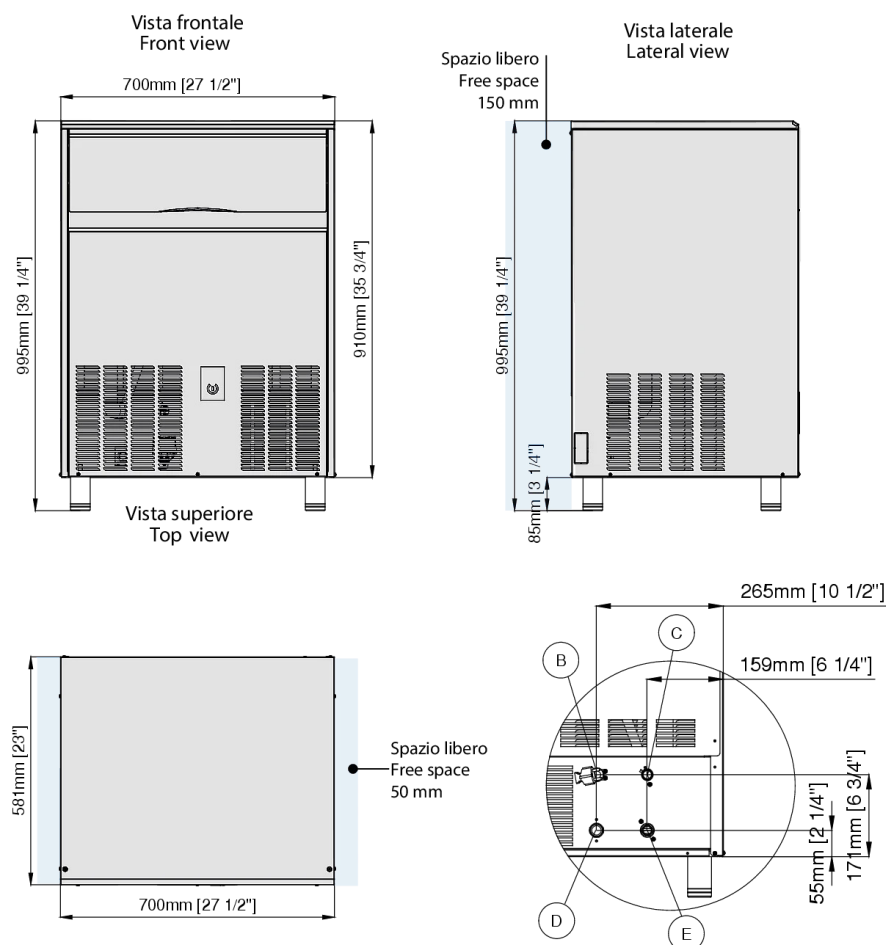


- B** Electrical cable supply
Ingresso alimentazione elettrica
- C** Water outlet connection
Attacco scarico acqua
Ø 20 mm
- D** Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm
- E** Water inlet connection / Attacco
entrata acqua - 3/4"G



MyICE


Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

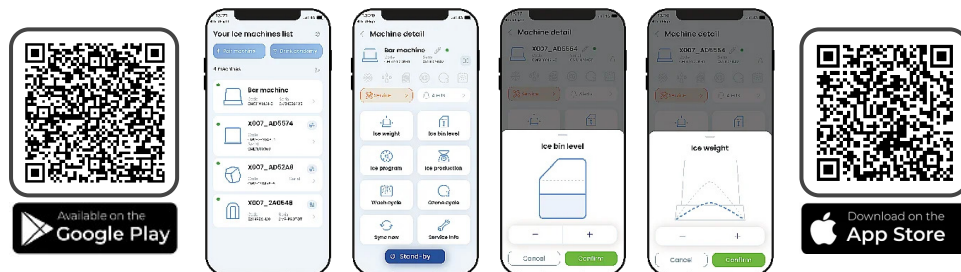

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1938 W
Air Volume	310 m³/h